


JOB NAME \_\_\_\_\_ CONTRACTOR \_\_\_\_\_  
 LOCATION \_\_\_\_\_ APPROVAL \_\_\_\_\_  
 ENGINEER \_\_\_\_\_ CONT. P.O. NO. \_\_\_\_\_  
 APPROVAL \_\_\_\_\_ REPRESENTATIVE \_\_\_\_\_

### 150lb Copper Coated Flange

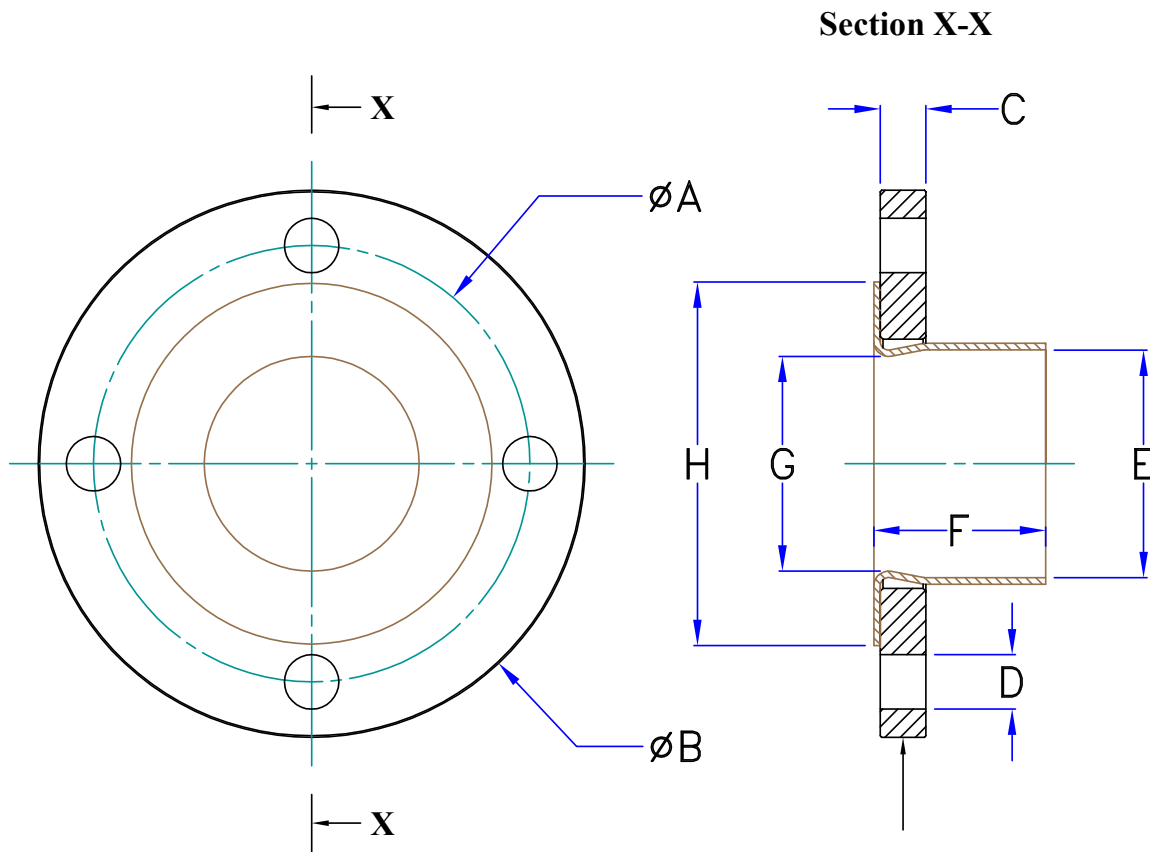

EDGE OF FLANGE MARKED WITH  
 CTS (Size) INCH 150LB - ANSI B16.5 (Heat Number\*)  
 EG: CTS 3 INCH 150LB - ANSI B16.5 11F24702  
 (\* If Specified)

Copper Component Manufactured to ASME B16.22

		1.5 INCH	2 INCH	2.5 INCH	3 INCH	4 INCH	5 INCH	6 INCH
	Code	CC015	CC002	CC025	CC003	CC004	CC005	CC006
A.	Bolt Circle Diam	3.88	4.75	5.50	6.00	7.50	8.50	9.50
B.	Flange Diameter	5.00	6.00	7.00	7.50	9.00	10.0	11.0
C.	Flange Thickness	0.63	0.63	0.63	0.63	0.71	0.75	0.87
	No. Bolt Holes	4	4	4	4	8	8	8
D.	Bolt Hole Diam	0.65	0.75	0.75	0.75	0.75	0.87	0.87
E.	Tube End Nom ID	1.63	2.13	2.63	3.13	4.13	5.13	6.13
F.	Cu Piece Length	1.60	1.85	2.02	2.35	2.81	3.87	4.31
G.	Cu Piece Min ID	1.47	1.94	2.42	2.89	3.84	4.70	5.72
H.	Cu Flange OD	3.10	3.70	4.20	5.00	6.20	7.30	8.40

Spec sheet measurements accurate at time of printing

